
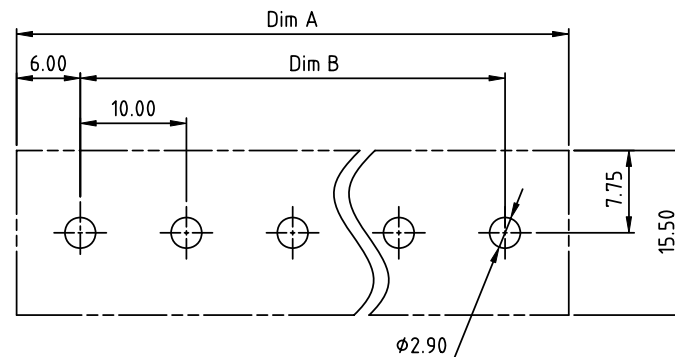
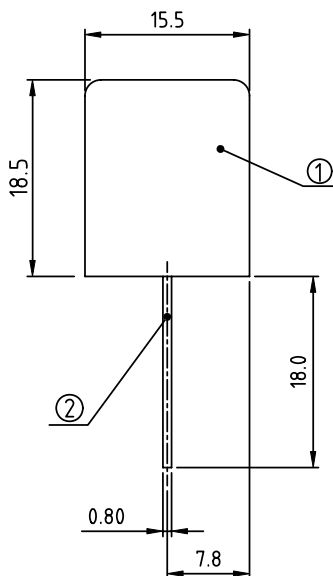
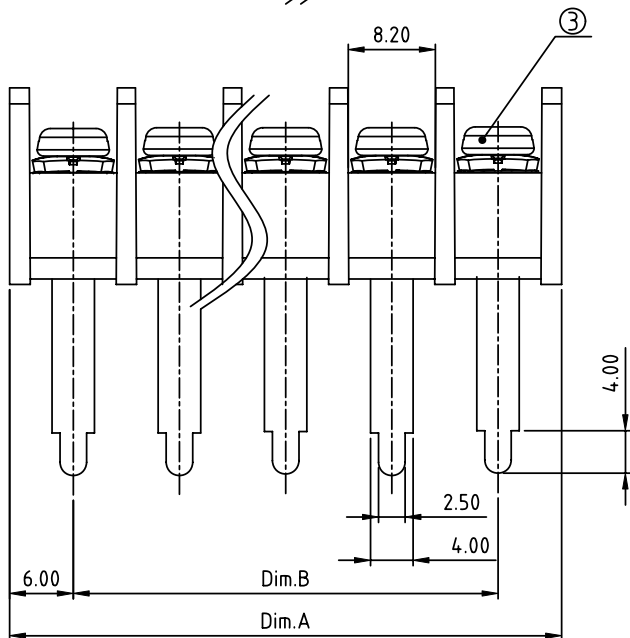


PRODUCT NUMBER	PITCH
YK616xx0x0JOG	10.00 mm

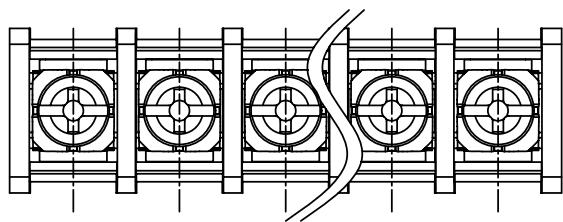

RECOMMENDED P.C.B LAYOUT
TOP VIEW

MATERIALS ELECTRICAL
 RATED VOLTAGE & CURRENT: 300 V, 25 A
 WITHSTAND VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 M Ω OR MORE AT DC 500 V
 OPERATING TEMPERATURE RANG: -40 °C ~ +115 °C
 SCREW TORQUE VALUE: 8.8 Lb-In.
 WIRE RANGE: 22 - 12 AWG
 1) HOUSING: Thermoplastic, UL 94 V-0 BLACK
 2) TERMINAL: BRASS, 0.8t
 3) TERMINAL SCREWS: STEEL, M3.5
 APPROVAL:

DIMENSION

Dim A	Nx10.0+2.0
Dim B	(N-1)x10.0

N=Number of poles

Poles	Tolerance
2p-5p	± 0.20
6p-10p	± 0.25
11p-16p	± 0.35
17p-24p	± 0.40
25p-32p	± 0.50

PART NO.: YK 616xx 0 x 0 JOG

No. of poles
 02 2 poles
 03 3 poles

 32 32 poles

Plated		
Code	Terminal	Screw
0	G/F	G/F
1	G/F	Zinc
2	Tin	G/F
3	Tin	Zinc

RoHS compliant
 (lead<4%)
 In copper Alloy

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn no	dr	date	tolerances unless otherwise specified	title TERMINAL BLOCK
				angles 	BARRIER TYPE
				X $\pm 1^\circ$	scale
		dr	EVAN LU	061614	dwg no
		enr	EVAN LU	061614	YK616xx0x0JOG
		chr	HANKE FENG	061614	sheet 1 of 1
		appd	SHI JUN	061614	size A4
					type CUSTOMER Drawing
sheet index	revision	A			
	sheet	1			