
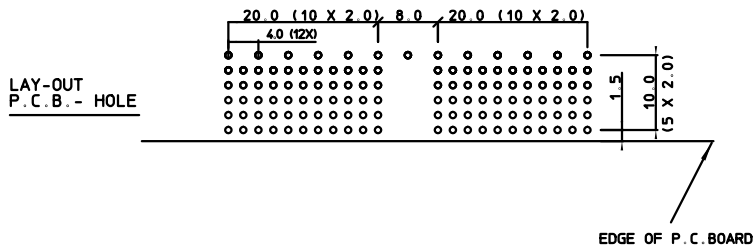
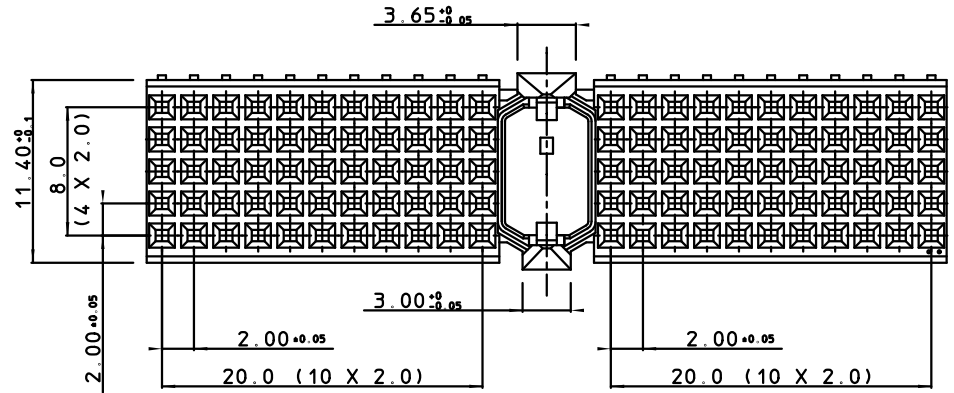
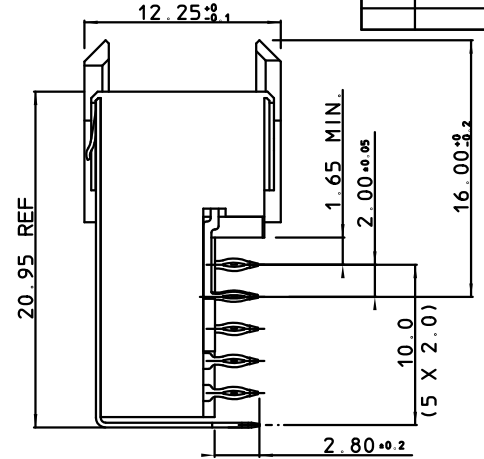


BS,C ,201444,036,02

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90	REV.	DATE	DESCRIPTION	BY	C'K'D'																
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	76	81	82	83	84	88	01	20-04-99	SHIELD CONTS ROW F MODIFIED	W.P.	
																															02	05/11/99	SHIELDING LENGTH MODIFIED	N.O.	

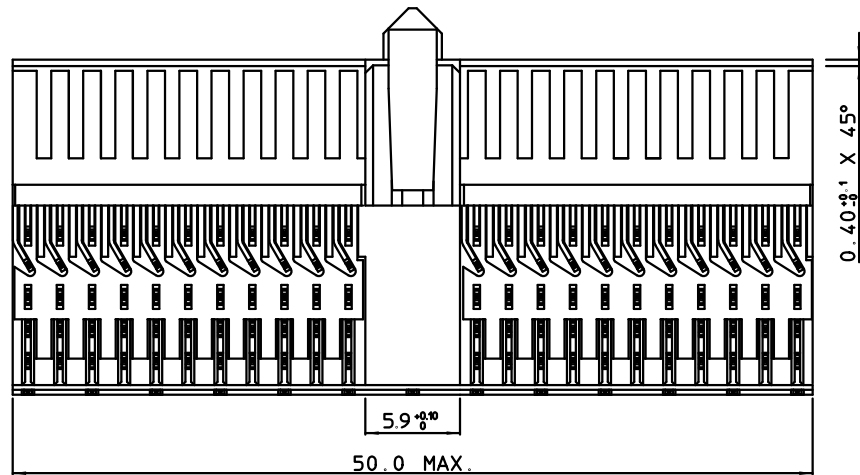

PERFORMANCE CHARACTERISTICS

- CURRENT RATING : 1,5 A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT / CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE : 20 mΩ MAX
- INSERTION FORCE : 0.75 N MAX / CONT
- EXTRACTION FORCE : 0.15 N MIN / CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES

- '--' PERFORMANCE LEVEL INDICATION: Z1= PL3 (SEE CAT. NR.) N9= PL2 E9= PL1
- CSA CERTIFIED, FILE NUMBER LR 44961-51. UL APPROVED, FILE NUMBER E31151.

FEMALE SIGNAL RIGHT ANGLE PRESS-FIT-TO-BOARD CONNECTOR WITH SERVICECENTER

1DEC ±0.2 2DEC ±0.1 ANGLES ±1° HOEKEN	1DEC 2DEC	APPR. DRAFT CHECKED	DATE 30-03-99	SIGN. M.Fret	MILLIPACS 2 / TYPE A / UPPER SHIELDING (ODD POS.)	CAT. No. HM2R10PA5108--	
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.					PRD. MGR.	FRAMATOME CONNECTORS BELGIUM N.V. A. SPINOYSTRAAT 8, 2800 MECHELEN	
ALL DIMENSIONS IN MM					PR. ENG. MGR.		SCALE 3/1
ALLE AFMETINGEN IN MM					PR. MGT. MGR.		
REFERENCES / REFERENTIES							
					BS,C ,201444,036,02 DRAWING No. CUSTOMER DRAWING		

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE.

DIT IS ONZE EIGENDOM EN MAG NIET NADERHAANT, HERDRUKT, OVERGEDRUKT AAN DERDEN, NOCH VOOR FABRICATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS TERUGZENDING VERPLICHT.