

NOTES: UNLESS OTHERWISE SPECIFIED


1. P/N: XL1COLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.

CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD
PLATED PER MIL-G-45204.4001 0.00001
[0.000254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

2. P/N: 9260COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

3. P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

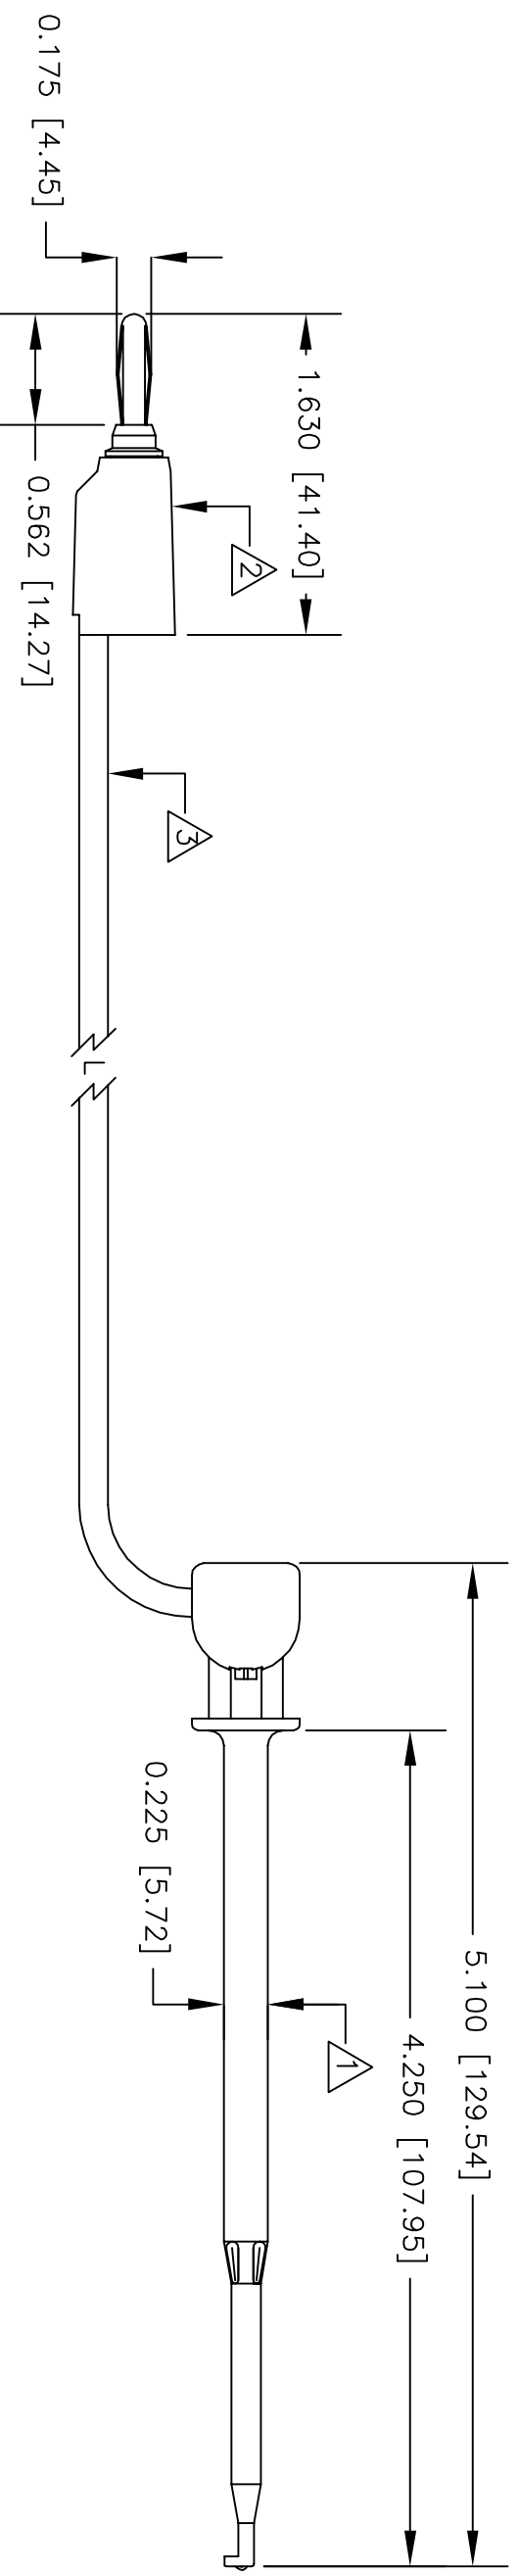

REVISIONS		DATE	APPROVED
LTR			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
±	.XX ±	±	
±	.XXX ±	±	
MATERIAL SEE NOTE.		APPROVALS	DATE
FINISH SEE NOTE.		R.L	9/10
APPLICATION		APPROVED BY	
USED ON			
DO NOT SCALE DRAWING			
DESCRIPTION		SIZE	CODE IDENT NO.
MINI-HOOK (XL1) TO		B	08505
STK BANANA PLUG (9260)		SCALE	DRAWING NO.
		1:1	601XL1
		SHEET 1 OF 1	REV.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.

EZ-HOOK DIVISION OF TEKTEST INC.
ARCADIA, CA 91006 U.S.A.