



12 Right-Angle Outlet Vertical Power Strip, 120V, 15A, 15-ft. Cord, 5-15P, 36 in.

MODEL NUMBER: PS3612RA

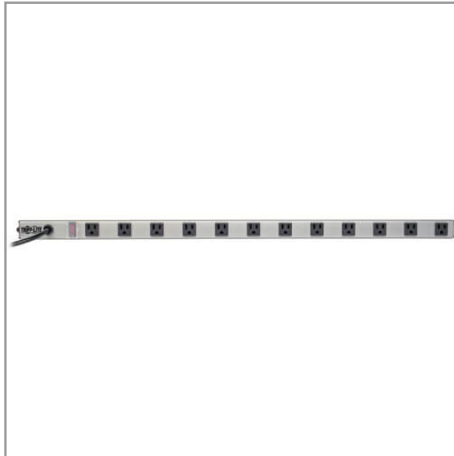

Highlights

- 12 right-angle receptacles
- Convenient and safe covered, on/off switch
- 15-amp circuit breaker
- 15-ft. cord with right angle plug
- 36-in. length

Package Includes

- PS3612RA Power Strip
- Mounting hardware
- Instruction manual

Description

Tripp Lite's PS3612RA power strip offers 15 amp, 120V multi-outlet AC power distribution in a convenient 36 inch mountable housing. Ideal for horizontal or vertical raceway style power distribution in office, workbench, industrial, networking and telecom applications. Includes 12 right-angle NEMA 5-15R receptacles with 2.64 inch center-to-center spacing, 15 ft AC line cord and lighted power switch with locking transparent cover to prevent accidental shutoff. Sturdy all-metal extruded aluminum housing stands up to demanding network, laboratory or factory environments.

INPUT/OUTPUT: Input: NEMA 5-15P/Output: 12 NEMA 5-15R

ELECTRICAL: 120V AC, 50/60Hz, 15A

FORMAT: 36 in. corded, mountable power strip

Features

- Sturdy all-metal 36-inch corded strip format with 2.638 inch center-to-center outlet spacing
- Includes 12 right-angle NEMA 5-15R receptacles
- Ideal for horizontal or vertical raceway style power distribution in office, workbench, industrial, networking and telecom applications
- Lighted power switch with locking transparent cover prevents accidental shutoff
- 15 amp electrical capacity with circuit breaker
- 120V AC, 50/60Hz electrical compatibility

Specifications

| OVERVIEW | |
|----------|--------------|
| UPC Code | 037332187468 |



| OUTPUT | |
|--|--|
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (12) 5-15R |
| Output (Watts) | 1800 |
| Circuit Breaker (amps) | 15 |
| Outlet Spacing | 2.638 in. |
| Right-Angle Outlets | Yes |
| INPUT | |
| Nominal Input Voltage(s) Supported | 120V AC |
| Recommended Electrical Service | 15A 120V |
| Input Connection Type | Right angle Nema 5-15P |
| Input Plug Features | Black |
| Input Cord Length (ft.) | 15 |
| Input Cord Length (m) | 4.57 |
| Input Cord Gauge Type | 14/3 SJT |
| Voltage Compatibility (VAC) | 120 |
| USER INTERFACE, ALERTS & CONTROLS | |
| Switches | Lighted 2 position switch controls power to all outlets |
| Locking Switch Cover | Transparent on/off switch cover prevents accidental turn-off |
| PHYSICAL | |
| Shipping Dimensions (hwd / in.) | 2.40 x 4.60 x 40.00 |
| Shipping Dimensions (hwd / cm) | 6.10 x 11.68 x 101.60 |
| Shipping Weight (lbs.) | 4.00 |
| Shipping Weight (kg) | 1.81 |
| Unit Dimensions (hwd / in.) | 1.25 x 1.50 x 36 |
| Unit Dimensions (hwd / cm) | 3.18 x 3.81 x 91.44 |
| Unit Weight (lbs.) | 3.23 |
| Unit Weight (kg) | 1.47 |
| Material of Construction | Aluminum |
| Included Mounting Accessories | Includes mounting clips |
| Receptacle Color | Black |
| Color (AC Line Cord) | Black |



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

| | |
|--|--|
| Form Factors Supported | Supports horizontal or vertical raceway style power distribution in office, workbench, industrial, networking and telecom applications |
| Outlets Measurement (Center to Center) | 67mm |
| CERTIFICATIONS | |
| UL1363 (Power Tap) | UL1363 |
| cUL / CSA (Canada) | cUL |
| WARRANTY | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>