



REV	BY	DATE	ECN/ERO	DESCRIPTION
00	Terry	8/5/17	----	PRODUCTION RELEASE

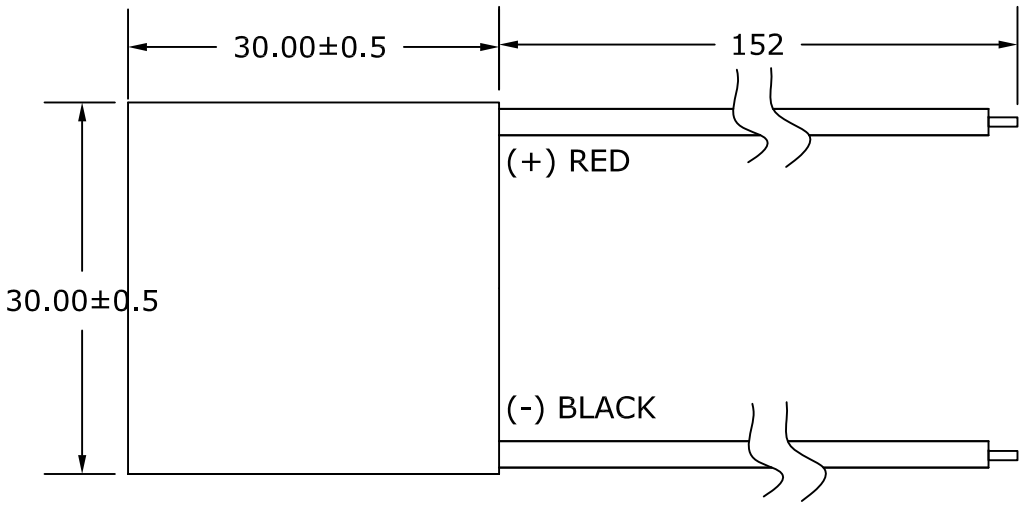

NOTES:


- ① Wire are UL1213, AWG24,19/36, PTFE.
- 2. Lapped both side, height is 3.200 ± 0.025 mm, flatness and parallel is 0.025mm.
- ③ Sealed with RTV 132.
- ④ Printing at cold side.
- ⑤ ACR: 1.920-2.133-2.347 ohms(23°C)

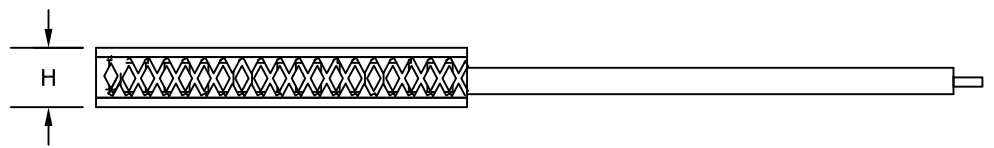

Ceramic Material: Alumina(Al_2O_3)
Solder Construction: 232°C SbSn

REFERENCE ONLY!	
Nominal Specs (@25°C)	
I_{max} (A)	6.0
U_{max} (V)	15.4
Q_{max} (W)	53.3
ΔT_{max} (°C)	67

NOTE:
ALL DIMENSIONS = mm

 <p>3908 Patriot Dr, Suite 140 Durham, NC 27703</p> <p>PH. (919) 597-7300 FAX (919) 597-7301</p>		P/N	DESCRIPTION	
		387001795	ET6,127,F1,3030,TA,RT,W6	
<p>SURFACE FINISH 3.2 μm 125 μln (UNLESS OTHERWISE SPECIFIED)</p> <p>BREAK ALL EDGES; 0.015 [0.40mm] x 45°</p>		TITLE		
		THERMOELECTRIC MODULE 232° SbSn CONSTRUCTION		
		NAME	DATE	DWG NO
DRAWN BY	Terry	8/5/17	387001795	00
INITIATED BY				
APPROVAL				